

OYEAF



KEY FEATURES INCLUDE:

- · Standard sizes 45-300 litres (see reverse)
- · Mains, medium and low pressure options
- Custom made model up to 800 ltr
- · Lightweight, easy installation
- Future-proofed
- · Duplex stainless steel barrel to withstand high temperatures without damage to the cylinder
- Options for Solar/Wetback/Heat pump/Radiator-boiler systems/Underfloor & Outdoor
- · Direct and coil models for the above systems (also twin coil)
- · Double element option for quick heat recovery
- Nation-wide free delivery
- · Long life incoloy elements
- · Left and right connections
- · Low power usage through high density insulation
- Foamed with CFC free, non-ozone depleting polyurethane
- Energy efficent NZ MEPS Compliant
- Suitable for a wide range of water conditions
- Low maintenance

Our smart design and manufacturing process ensures that 'The Silver Bullet' is the best choice for a future proofed hot water cylinder you can rely on for durability and efficiency





Peter Cocks Hot Water Cylinders

MEPS



100% NZ DESIGNED & ASSEMBLED

THINK PETER COCKS FOR ALL YOUR WATER HEATING NEEDS

SUPERIOR QUALITY

Silver Bullet stainless mains pressure cylinders are manufactured to meet New Zealand minimum energy performance standards (MEPS).

COMPATIBILITY

Models to suit most systems including solar, wetback, heatpump, radiator boiler systems, underfloor & more.

ALL PRESSURE

Supplied as a choice of a low, medium, or high pressure unit. The Silver Bullets maximum inlet pressure is 500kPa.

SOLAR EFFICIENCY

The Silver Bullet can be specified with connections for both open and closed circuit solar heating for simple adaption to solar energy, enabling your household to reduce energy consumption.


INTELLIGENT DESIGN

For all pressure future proof thinking and triple inlet replacements.

EASY INSTALLATION

The Silver Bullet is light weight and easy to install, and is manufactured to all relevant building codes. When installed correctly, they comply with the requirements of the New Zealand building code, G12/AS1 and MEPS regulations.

All cylinders supplied with 10kw TPR Valve 850kPa, except Wetback models supplied with 46kw TPR Valve 850kPa

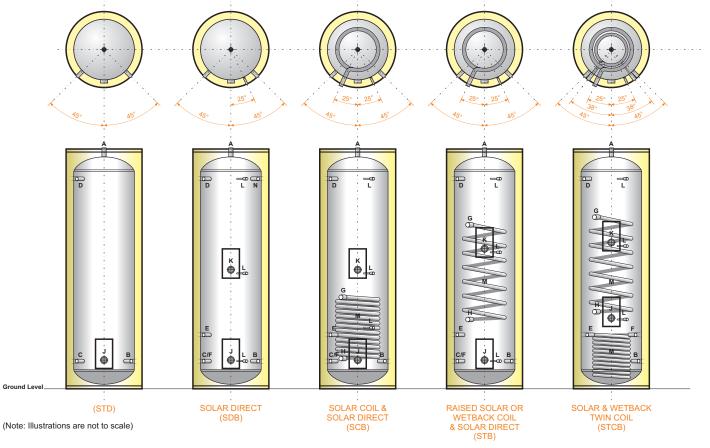

FEATURES			STD/SDB								SCB/STB		STCB		
DESCRIPTION	CONNECTION	45L	90L	135L	135L	180L	180L	200L	250L	280L	300L	250L	300L	250L	300L
CYLINDER DIAMETER		485	485	485	560	485	560	560	560	560	560	560	560	560	560
A Hot Water Draw-Off (Cylinder Height)	3/4" BSP F	530	940	1365	1010	1780	1295	1450	1725	1900	2045	1725	2045	1725	2045
B Right Cold Feed (High Pressure) Inlet	3/4" BSP F	N/A	N/A	165	200	180	200	200	200	200	200	200	200	200	200
C Left Cold Feed (High Pressure)	3/4" BSP F	165	165	165	200	180	200	200	200	200	200	200	200	-	-
D Safety TPR	3/4" BSP F	TOP	720	1135	760	1555	1035	1220	1500	1655	1810	1 500	1810	1500	1810
E From Solar (Inlet) / HP Return Kit set - excludes STD Model	3/4" BSP F & 1" BSP M	-	-	-	-	370	370	370	370	370	370	370	370	370	370
F To Solar (Outlet)	3/4" BSP F	-	-	-	-	180	200	200	200	200	200	200	200	370	370
G Secondary Solar/Wetback Flow (Coil)	3/4" BSP F & 1" BSP M	-	-	-	-	-	-	-	-	-	-	685/1285	685/1285	1340	1340
H Secondary Solar/Wetback Return (Coil)	3/4" BSP F & 1" BSP M	-	-	-	-	-	-	-	-	-	-	245/485	245/485	540	540
J Lower Element	1 1/4" BSP F	✓	√	√	√	√	√	√	√	√	√	✓	✓	√	✓
K * Upper Element (SDBoost) - excludes STD			-	-	-	-	-	-	\checkmark	\checkmark	\checkmark	✓	✓	√	✓
L Sensor Probe Pocket - excludes STD	Ø8.5mm x 120mm Tube	-	-	-	-	-	-	-	\checkmark	\checkmark	\checkmark	✓	\checkmark	\checkmark	\checkmark
M Coil	10m Coil	-	-	-	-	-	-	-	-	-	-	✓	\checkmark	✓	✓
N Extra R/H Outlet or TPR on SDB		-	-	-	-	-	-	-	√	-	✓	-	-	-	-
F - Female M - Male		Fit	ting heigh	ts measure	d from bot	tom of cyli	nder (in m	m). All me	asurement	s are nomi	nal.				

(*) - Upper element supplied plugged. Element & T/Stat sold as an optional extra

CUSTOM MADE CYLINDERS, NEW SIZES NOW AVAILABLE

430MM, 485MM, 540MM, 560MM, 575MM, 670MM, 690MM , 800MM DIAMETER.

PLEASE SEE OUR WEBSITE OR YOUR LOCAL MERCHANT FOR AN ORDER FORM

* Stainless steel cylinders are guaranteed for 10 years in domestic use. The remaining parts of the unit carry

a 12 month warranty. For full warranty conditions please see **www.petercocks.co.nz**

* All information is current at the time of publication, (April 2016) but may change without notice. Please check the specifications are current at the time of ordering or building to incorporate the appliance see www.petercocks.co.nz

114 Maces Rd • Christchurch 8062 • New Zealand P: (03) 384 1360 • 0800 555 048 • F: (03) 384 5903 • E:info@petercocks.co.nz www.petercocks.co.nz

